


Instructions



Patch HW1 & HW2 Hee Welling 2020

Congratulations with your new Patch table, designed by Hee Welling. We hope you will enjoy using this product and follow these instructions to ensure correct installation. If you have any questions or comments, please do not hesitate to contact us by mail on:

info@andtradition.com

Patch HW1 & HW2 Hee Welling 2020

Please read these instructions carefully and retain them for future reference to ensure that the product is used correctly. For your own safety, please study each step of this instruction manual first. &Tradition is not responsible for any faults or damages caused by not following these instructions correctly. Do not modify this product in any way.

Contents

- A Table top with rails and extending table top
- B Table leg x4
- C Leg fitting x4
- D Threaded rod x8
- E Nut x8
- F Wrench
- G Distance block









Safety precautions

- Dispose of plastic bag from packaging and do not allow children to play with it.
- The table is only intended for indoor use.
- Handle table top with care in order not to scratch surfaces.
- Two or more adults are required when lifting the table.
- Spilled liquids of any kind should be removed immediately from the table top as it may penetrate the surface treatment and cause damage to it.

Cleaning instructions

- Laminate table top:
Laminate is a hard-wearing and maintenance free material. Laminate can be cleaned with a soft cloth wrung in a mild solution of lukewarm water and an universal cleaning detergent. Always wipe with a dry soft cloth after cleaning. For difficult stains such as coffee or tea use a nylon bristle brush with mild household cleaner or detergent, rinsing with clean water and repeating as necessary. Rinse thoroughly with water.

- Solid wood base and legs:
To maintain the look and silky feeling of oiled wood, regular re-oiling is recommended. Re-oiling should be done when the wood starts to appear dry or faded. Usually, reoiling four times every year is sufficient.

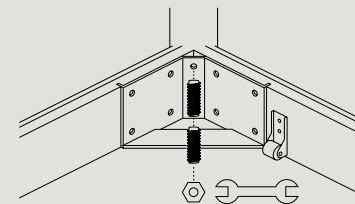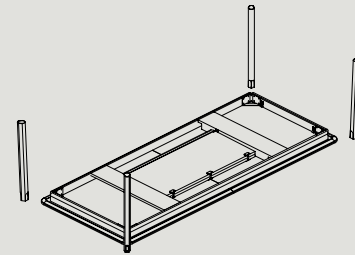

Step 1

Place table top (A) upside down on a soft, flat surface. Two or more adults are recommended to lift the table top out of the packaging.

Place legs (B) where every rail joins, aligning each leg with the two holes as illustrated.

Step 2

When mounting the table legs (B), make sure to place a distance block (G) between the top of the leg and the table top.

Step 3

Align the leg fitting (C) with the leg's matching space. Repeat step 2 and step 3 with the remaining leg fittings.

Step 4


Place the threaded rod (D) in the appointed holes and tighten it to the leg fitting (C). Then fasten the nut (E) to the threaded rod with the wrench (F).

Repeat the task for the remaining legs. Finally remove the spacer (G) and dispose of it.

Step 5


Flip the table. Be aware that two or more adults are required for this action.

Important: When turning the table, never let it rest on two legs. It has to be lifted and placed on all four legs.

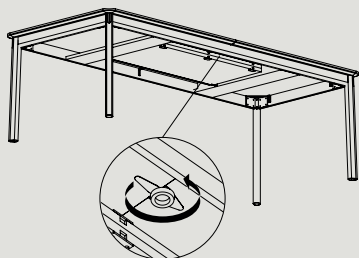


Step 6

For extending the table, firstly open the table spring underneath the table top by rotating it.

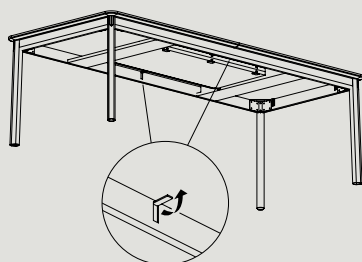


Step 7

Open the two locks.

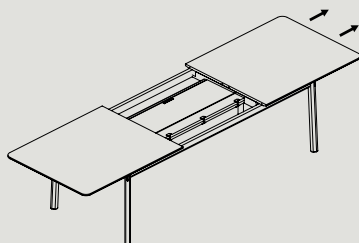

Step 8

Pull the table in one end all the way back. This step requires only one person as the table has a synchronous table slide rail.

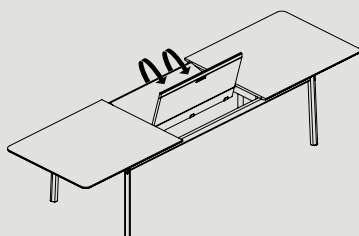

Step 9

With the handle, lift the extending table top and place it on top of the supporting surface. Push the table tops into place and put the two locks in locked position.